

## DC-DC Converter ( Non Isolated )

### A ) Model: ID241201

**Features:**

- Automobile Application
- Plastic Enclosure
- I/P Non Polarized

**Wattage: 12 W**

I/P: 24 V DC

Output : 12V DC / 1A

SIZE: 90 L x 43 W x 33 D MM

Weight: 60 gms



### B ) Model: ID241201

**Features:**

- Metal Enclosure
- Automobile Application
- Sturdy Design

**Wattage: 60 W**

I/P: 24 VDC,

Output : 12V DC/ 5A

SIZE: 135 L X 75 W X 47 D MM

Weight:435 gms

## DC-DC Converter ( Isolated )

### C ) Model: GD50A-05

**Features:**

- Metal Enclosure
- Industrial Application
- Sturdy Design


**Wattage: 50 W**

I/P: 12 VDC

Output : 5 V DC/ 10A

SIZE: 165 LX 100 W X 45 D mm

Weight:480 gms

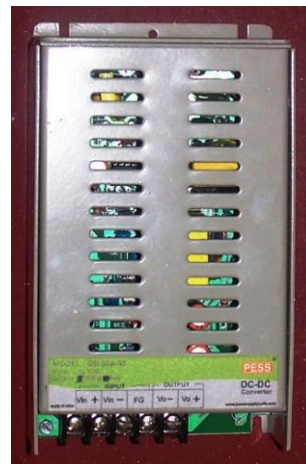

### D ) Model: GD75C-24

**Features:**

- Metal Enclosure
- Industrial Application
- Sturdy Design

**Wattage: 75 W**

I/P: 48 VDC

Output : 24 V DC/ 3.0 A

SIZE: 210 LX 100 W X 45/70 D mm

Weight:700 gms

**E ) Model: GD100C-24**

**Features:**

- Metal Enclosure
- Industrial Application
- Sturdy Design

**Wattage: 100 W**

I/P: 48 V DC

Output : 24 V DC/ 5A

SIZE: 210 LX 100 W X 45/70 D

mm

Weight:700 gms



**DC-DC Converter ( Isolated ) Custom Built**

**F ) Model: 48240P5**

**Features:**

- Metal Enclosure
- Industrial Application
- Sturdy Design

**Wattage: 12 W**

I/P: 48 V DC

Output : 24 V DC/ 0.5 A

SIZE: 120 LX 62 W X 45 D mm

Weight:280 gms



**G ) Model: 482401**

**Features:**

- Metal Enclosure
- Industrial Application
- Sturdy Design

**Wattage: 30 W**


I/P: 48 V DC

Output : 24 V DC/ 1.2 A

SIZE: 135 L X 75 W X 47 D mm

Weight:435 gms

**H ) Model: IS24500**

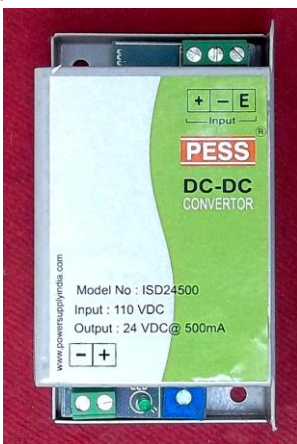

**Features:**

- Metal Enclosure
- Industrial Application
- Sturdy Design

**Wattage: 12/30 W**

I/P: 110/220 V DC

Output : 24 V DC/0.5 or  
48 V DC/1 A

SIZE: 120 LX 65 W X 45 D mm

Weight:280 gms

**I) Model: ISD50W48**



**J) Model: ID2204805**



**Features:**

- Metal Enclosure
- Industrial Application
- Sturdy Design

**Wattage: 240 W**

I/P: 220 V DC

Output : 48 V DC/5 Amp

**K) Model: ISD480W48**



**Features:**

- Metal Enclosure
- Industrial Application
- Sturdy Design

**Wattage: 480 W**

I/P: 220 V DC

Output : 48 V DC/10 A

**L) Model: 960W48**



**Features:**

- Metal Enclosure
- Industrial Application
- Sturdy Design

**Wattage: 960 W**

I/P: 220 V DC

Output : 48 V DC/20 Amp

## **PESS Corporation**

312, Shaniwar Peth, Siddhant Apt. Campus, PUNE.411030 (INDIA)

Tel.91-20-2448 7774, 2448 3234 Fax : 91-20-24487774

Email1: [pess@vsnl.net](mailto:pess@vsnl.net) / [pesscorporation@gmail.com](mailto:pesscorporation@gmail.com)

Website:[www.powersupplyindia.com](http://www.powersupplyindia.com)

Email2: [sales@powersupplyindia.com](mailto:sales@powersupplyindia.com)